


CARMEN XL



*door size 445mm x 445mm

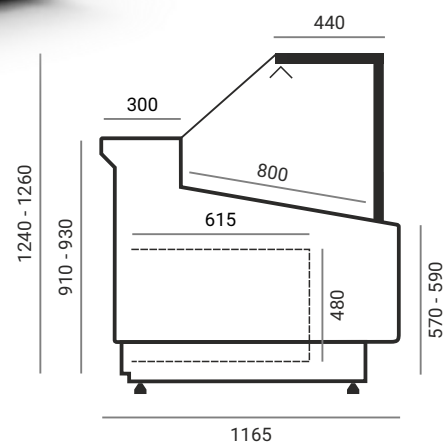

ENVIRONMENTALLY FRIENDLY
FACTOR (PROPANE)



STANDARD EQUIPMENT

- ▶ Cooling: 2 independent dynamic circuits: for chamber and display
- ▶ Integral condensing unit (plug in)
- ▶ Divided front glass, open to the sides
- ▶ Silver metal profiles
- ▶ ABS sides and hull insulated with eco-friendly polyurethane foam
- ▶ Front made of power coated sheet
- ▶ Stainless steel exposition H17
- ▶ Worktop made of stainless steel H18
- ▶ Large storage chamber made of stainless steel H17
- ▶ Automatic vaporization of condensate
- ▶ 2x Thermostat with automatic defrost and digital display
- ▶ Exposition lighting - LED lamps
- ▶ Night covers



OTHER VERSIONS

- ▶ Addapted to combining CARMEN modules with one line
- ▶ For remote condensing unit with expansion valve
- ▶ Interior and exterior corners
- ▶ Cash table CARMEN LS-R8
- ▶ Self service with range +6 ÷ +10 °C



TECHNICAL DATA

LENGTH	mm	1570	2000	2580	3060
WIDTH	mm	1165			
HEIGHT	mm	1240 - 1260			
TEMPERATURE RANGE	°C	FROM +1°C TO +7°C			
ENVIRONMENTAL CONDITIONS		AMBIENT TEMPERATURE 25°C, RELATIVE HUMIDITY 60%			
REFRIGERANT	—	R290			
USABLE CAPACITY	l	645	835	1065	1280
EXPOSITION SPACE	m ²	1,18	1,53	2,0	2,38
RATED VOLTAGE	V	230/50Hz			
REQUIRED REFRIGERATION POWER	W/m	550			
CHAMBER CAPACITY (EURO 2 CONTAINERS)	pcs	4	8	8	10



ADDITIONAL EQUIPMENT

- ▶ Granite working top
- ▶ Metal profiles painted according to the RAL palette
- ▶ Casing made of laquered MDF - any color according to the RAL palette
- ▶ Glass shelf in the exhibition area
- ▶ Movable plexi divider or immovable glass divider
- ▶ Metal rail, for customer use
- ▶ Evaporater heater
- ▶ LED lighting for meat exposition
- ▶ Cascade overlay
- ▶ Electric socket
- ▶ Support for knives
- ▶ Slidable shelf for scales/slicer
- ▶ Wheels
- ▶ Anti Corrosion protection of evaporator (cataphoresis)
- ▶ Automatic vaporization of condensate
- ▶ Overlays: non-threshold chamber