



# DOROTEA S

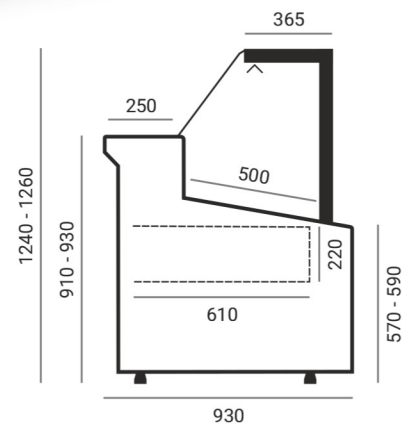

ENVIRONMENTALLY FRIENDLY  
FACTOR (PROPANE)

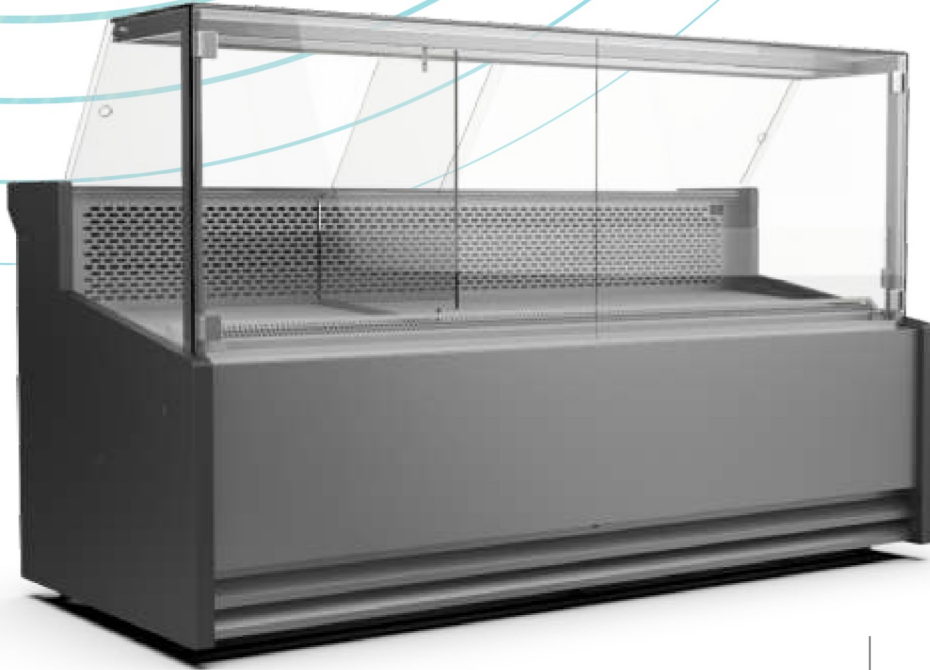

## STANDARD EQUIPMENT

- ▶ Cooling system: static
- ▶ Integral condensing unit (plug in)
- ▶ Front glass with lift up system of glass
- ▶ Silver metal profiles
- ▶ ABS sides and hull insulated with eco-friendly polyurethane foam
- ▶ Front made of power coated sheet H17
- ▶ Stainless steel exposition H18
- ▶ Worktop made of stainless steel
- ▶ Storage chamber made of stainless steel H17 (door size 515mmx230mm)
- ▶ Thermostat with automatic defrost and digital display
- ▶ Exposition lighting - LED lamps
- ▶ Night covers



## OTHER VERSIONS

- ▶ Adapted to combining modules with one line
- ▶ For remote condensing unit with expansion valve
- ▶ Cash table DOROTEA



## ADDITIONAL EQUIPMENT

- ▶ Granite working top
- ▶ Metal profiles painted according to the RAL palette
- ▶ Casing made of laquered MDF board - any color according to the KRONOSPAN palette
- ▶ Glass shelf in the exhibition area
- ▶ Movable plexi divider or immovable glass divider
- ▶ Metal rail, for customer use
- ▶ Evaporator heater
- ▶ LED lighting for meat exposition
- ▶ Cascade overlay
- ▶ Fresh fish container
- ▶ Electric socket
- ▶ Support for knives
- ▶ Slidable shelf for scales/slicer
- ▶ Wheels
- ▶ Anti Corrosion protection of evaporator (cataphoresis)
- ▶ Automatic vaporization of condensate



## TECHNICAL DATA

LENGTH	mm	970	1330	1570	2000
WIDTH	mm	930			
HEIGHT	mm	1240 - 1260			
TEMPERATURE RANGE	°C	OD +1°C DO +7°C			
ENVIRONMENTAL CONDITIONS		AMBIENT TEMPERATURE 25°C, RELATIVE HUMIDITY 60%			
REFRIGERANT	—	R290			
USABLE CAPACITY	l	275	360	435	550
EXPOSITION SPACE	m <sup>2</sup>	0,46	0,64	0,75	0,95
RATED VOLTAGE	V	230/50Hz			
REQUIRED REFRIGERATION POWER	W/m	350			